



HOW TO
Change overspeed governor on
EA7C

Table of contents

1	Introduction	3
2	Preparation.	3
2.1	Parts	4
2.2	Tools	4
3	Step by step	5
3.1	Dismount existing overspeed governor	5
3.2	Installation of the new overspeed governor	6


1 Introduction

If you for some reason must change the overspeed governor, the description below is explaining how you must carry out this operation.

2 Preparation.

Before you install the new overspeed governor please read these instructions carefully. Check that you have all the necessary parts and tools to perform the operation.

2.1 Parts

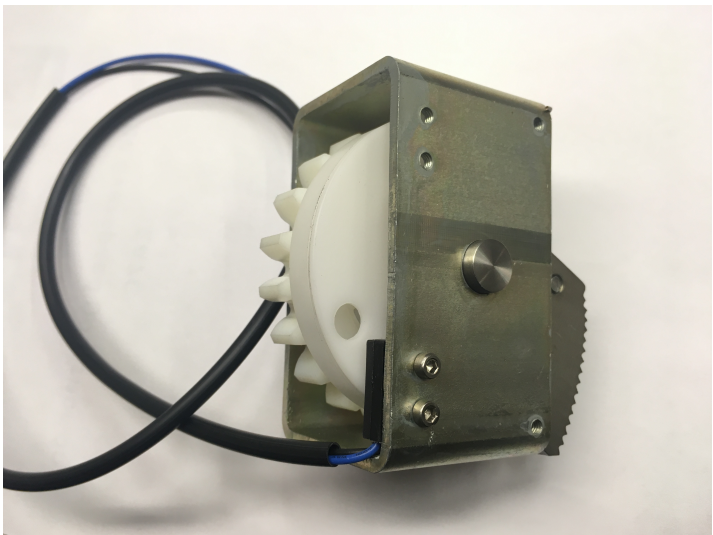

Overspeed governor		

2.2 Tools


13 mm spanner		



3 Step by step


3.1 Dismount existing overspeed governor

Dismount the locking plate, see pictures.

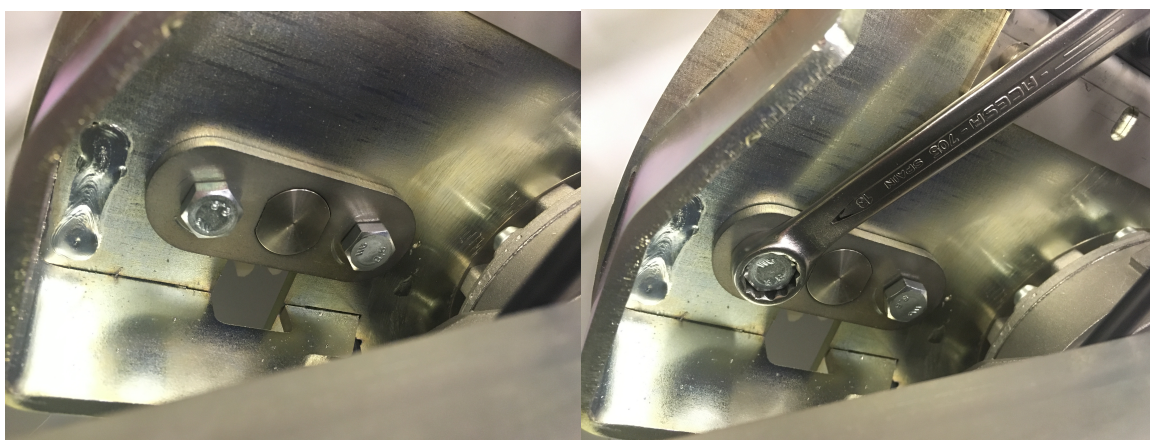


Use a 13 mm spanner to loosen the plate.

The locking plate is now removed:

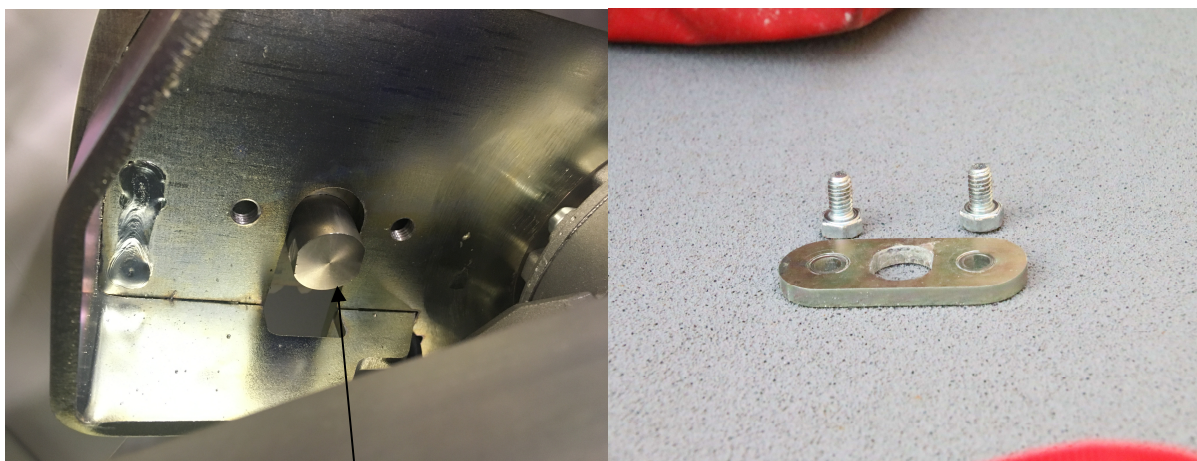

Pull out the shaft 2-3 mm

Loosen the wire below the overspeed governor:

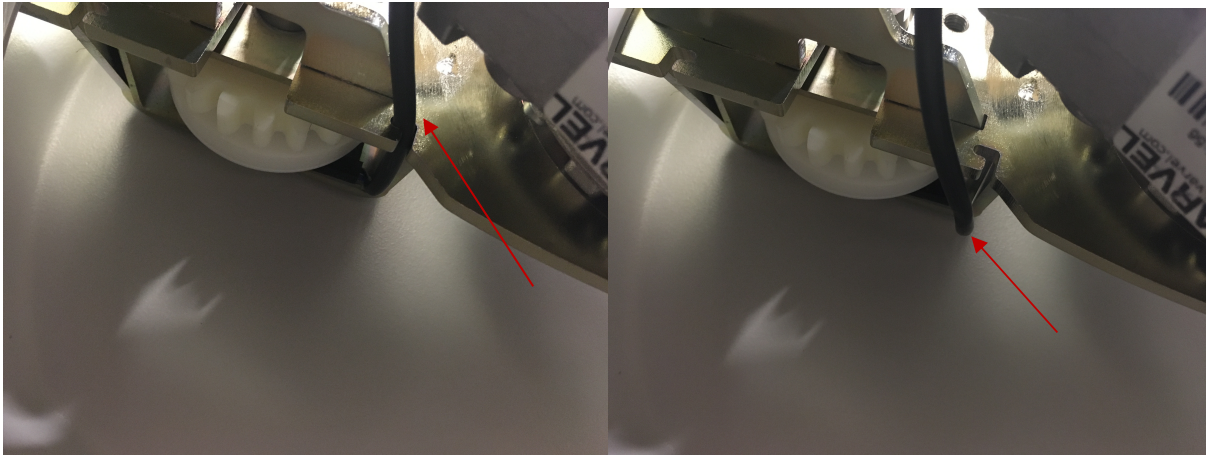

You can now remove the overspeed governor.

3.2 Installation of the new overspeed governor

The new overspeed governor can now be installed. You do this by following the previous steps in the opposite order:

Insert the new overspeed governor

Put the wire back in place

Push the shaft back in

Re-install the locking plate

Put the plug in the circuit board

The installation of the new overspeed governor is now completed and you can test run the lift.

(We reserve the right to make alterations on the lift)