
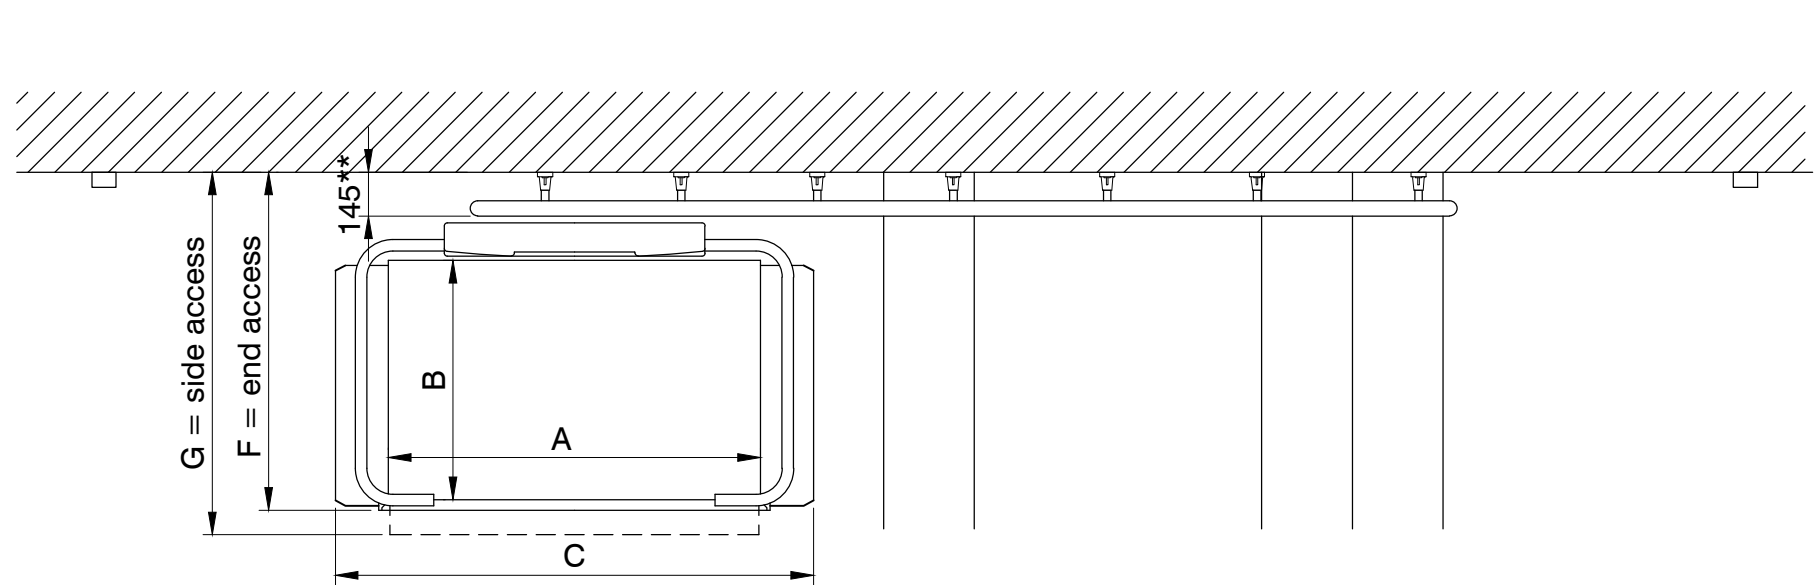


*** Optional Stanchion Mounted Rail**

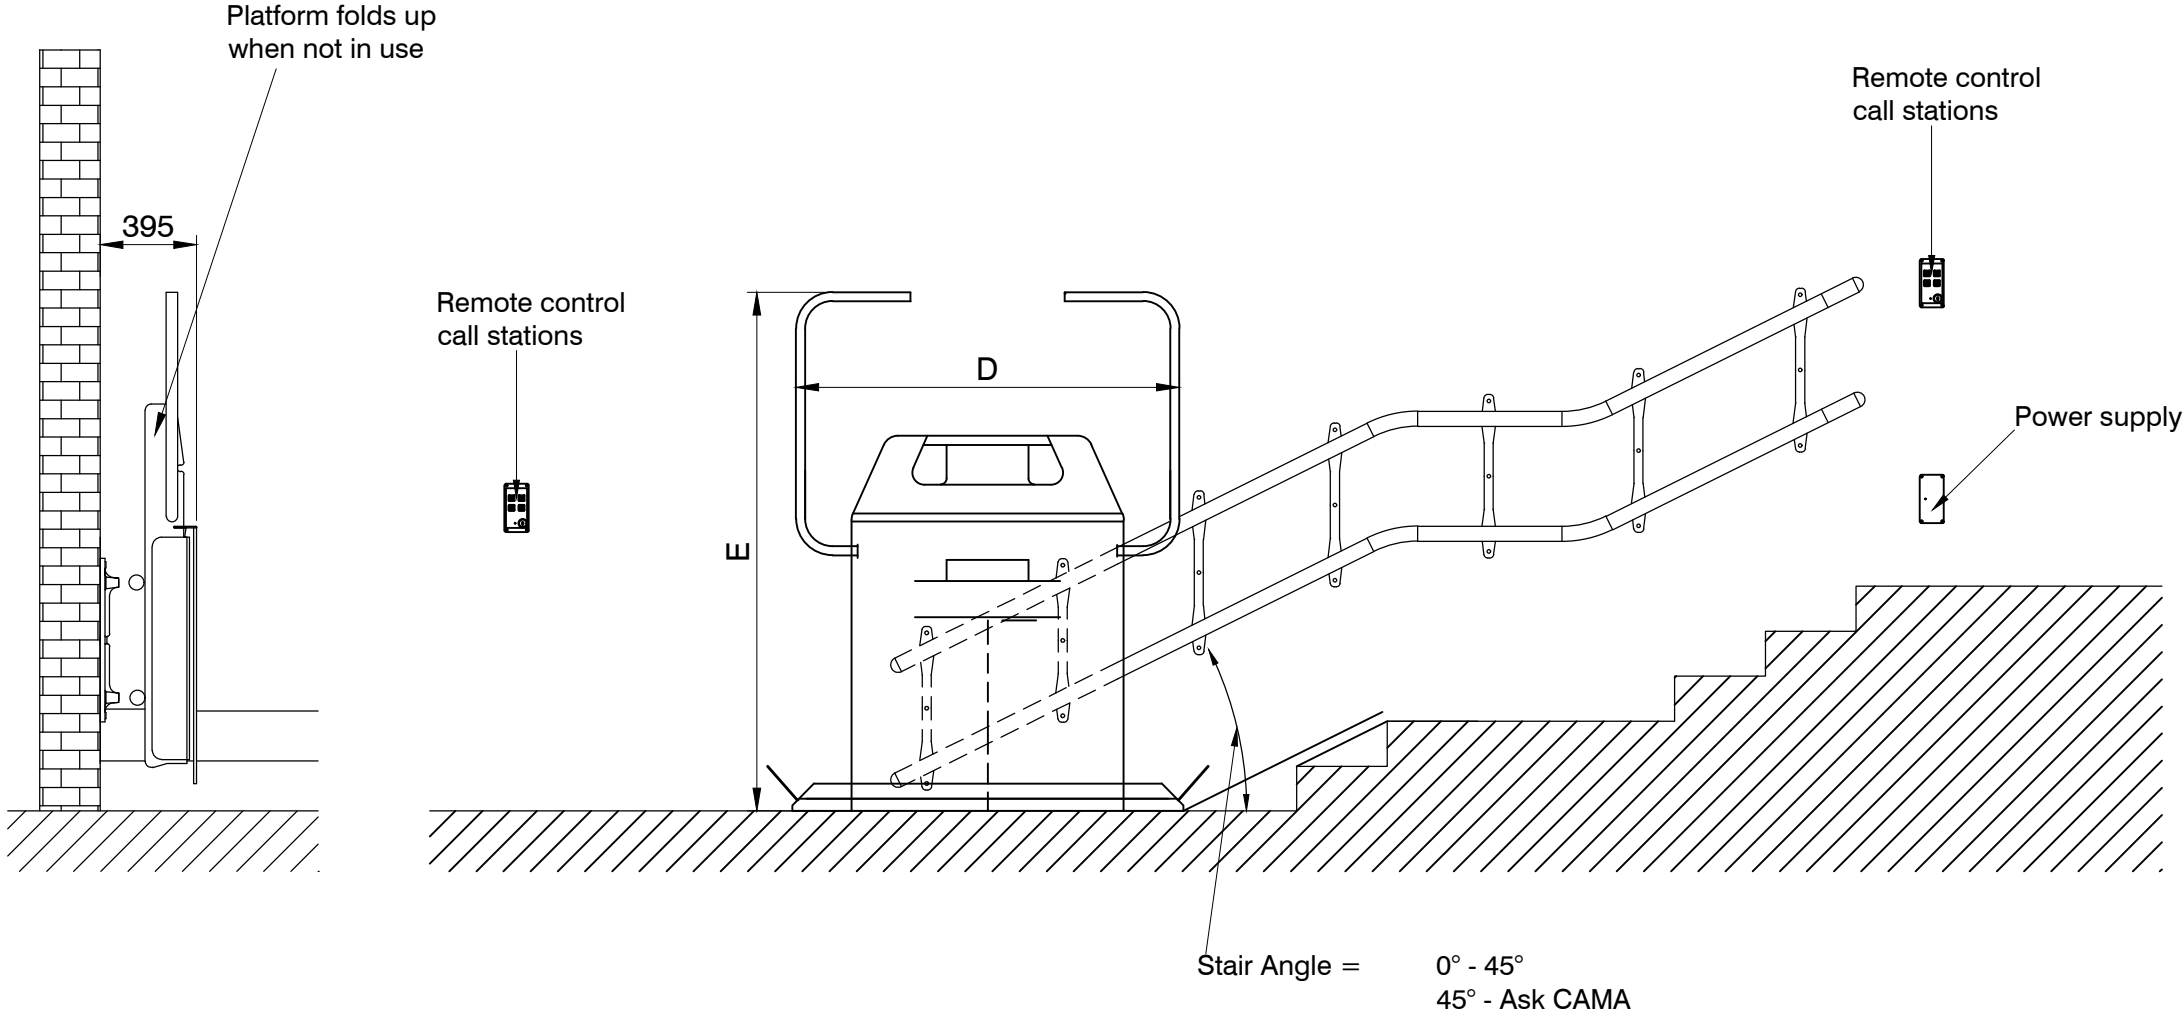

	950 X	1000 X	1200 X	1300 X
A	960	1010	1210	1310
C	1300	1350	1550	1650
D	960	1010	1210	1310


	X 800	X 750	X 700
B	800	750	700
E	1715	1665	1615
F	1130*	1080*	1030*
G	1285*	1235*	1185*

* = +80mm for stanchion mounted rail
** = Ask for smaller distance

Stairlift with platform Specification

Load: 225kg. (300kg.)
Drive: Rack and Pinion
Speed: 0.08m / sec
Travel: subject to survey
Stops: 8
Motor: 0.33kw
Power: 240v 1ph 50Hz 10A
Colour: RAL 7035 as standard
(alternative RAL colours available)

Note - Platform carriage available as a left hand or right hand unit

 aps. Ellehammervej 6 DK-9900 Frederikshavn Tel - +45 98 43 01 22 Fax - +45 98 42 08 62 E-mail - cama@cama.dk website - www.cama.dk		TITLE Handi-Lift EA6 – Curved stairlift with platform	
DWG NO. HL6-001		REV D	
SCALE A3 1:25	DATE 23.05.2016	DRAWN ABV	