

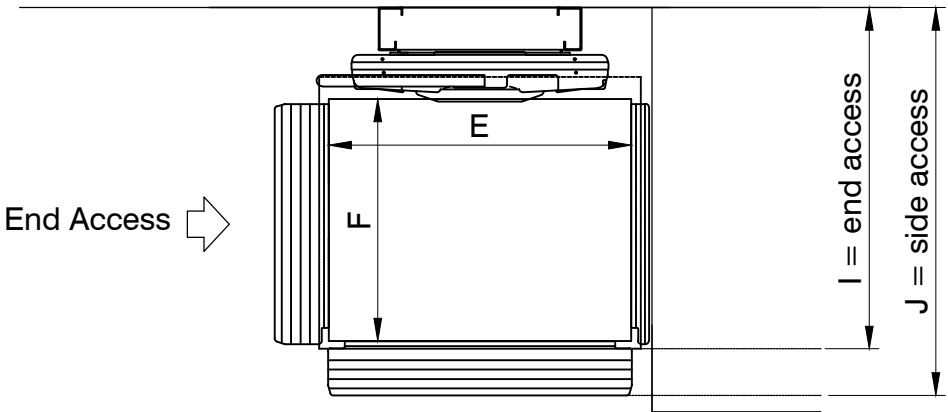


*Floor mounted tower

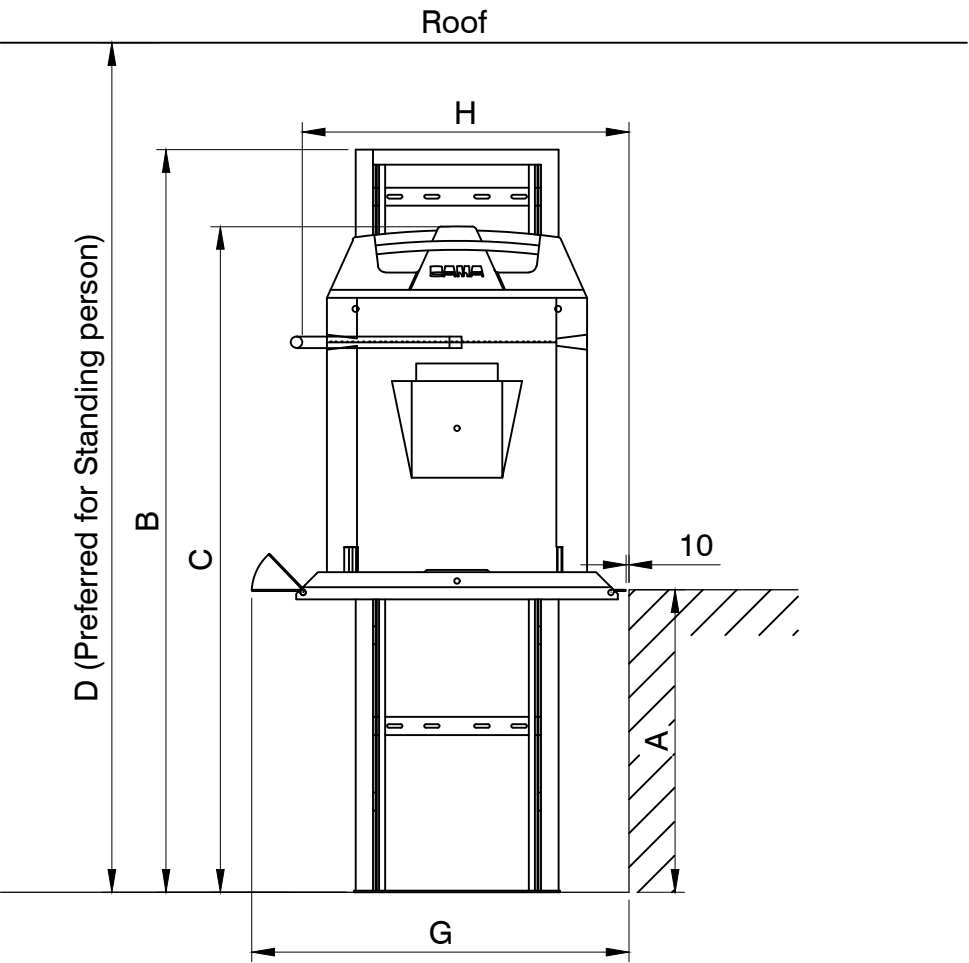

Side Access

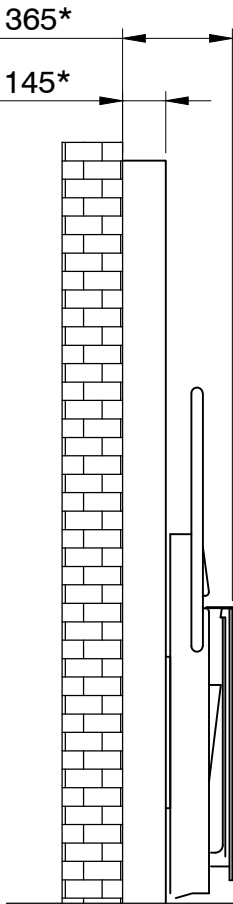

Raise	Required roof space			
	A	B	C	D
300	1956	1505	2110	
400	1956	1605	2210	
500	1956	1705	2310	
600	1956	1805	2410	
700	1956	1905	2510	
800	1956	2005	2610	
900	1956	2105	2710	
1000	1956	2205	2810	
1100	2456	2305	2910	
1200	2456	2405	3010	
1300	2456	2505	3110	
1400	2456	2605	3210	
1500	2456	2705	3310	

D: For seated passenger -400


	950 X	1000 X	1200 X	1300 X
G	1200	1250	1450	1550
H	1030	1080	1280	1380

	X 900	X 800	X 750	X 700	X 650	X 600
I	1230*	1130*	1080*	1030*	980*	930*
J	1385*	1285*	1235*	1185*	1135*	1085*


* = +320mm for floor bracket (Only for 0-1000mm.)

Vertical platform lift Specification

Load:	300kg.	Motor:	0.3kw
Drive:	Spindel and Nut.	Power:	240v 1ph 50Hz 10A
Speed:	0.9m / min.	Colour:	RAL 7035 as standard
Travel:	subject to survey		(alternative RAL colours available)
Stops:	2		

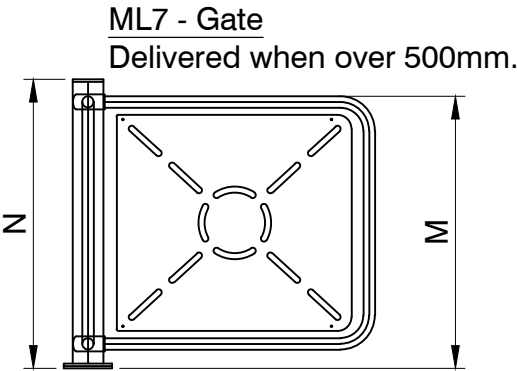

ML7 - Gate (Height)	
M	N
900	960
1100	1160

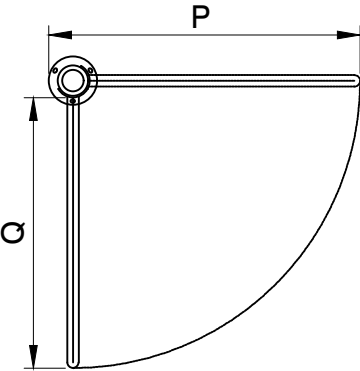

ML7 - Gate (Length)		
F	P	Q
x700	930	800
x750	980	850
x800	1030	900
E		
950x	1180	1050
1000x	1230	1100
1200x	1430	1300
1300x	1530	1400

Note - Vertical platform lift available as a left hand or right hand unit

 aps.

Ellehammervej 6
DK-9900 Frederikshavn
Tel - +45 98 43 01 22
Fax - +45 98 42 08 62
E-mail - cama@cama.dk
website - www.cama.dk

TITLE Handi-Lift ML7 - Vertical platform lift			
DWG NO. ML7-001			REV C
SCALE A3 1:25	DATE 12.03.2021	DRAWN ABV	